

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>H04Q 7/34, H04L 12/64</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 96/22665</b> <b>(43) International Publication Date:</b> 25 July 1996 (25.07.96)
<b>(21) International Application Number:</b> PCT/FI96/00017 <b>(22) International Filing Date:</b> 8 January 1996 (08.01.96) <b>(30) Priority Data:</b> 950097 9 January 1995 (09.01.95) FI <b>(71) Applicant (for all designated States except US):</b> NOKIA MOBILE PHONES LTD. [FI/FI]; P.O. Box 86, FIN-24101 Salo (FI). <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> JOKINEN, Harri [FI/FI]; Vähähiidentie 450, FIN-25370 Hiisi (FI). HÄMÄLÄINEN, Jari [FI/FI]; Matti Tapion katu 1 F 17, FIN-33720 Tampere (FI). POSTI, Harri [FI/FI]; Rantakatu 14 B 17, FIN-90120 Oulu (FI). <b>(74) Agent:</b> BERGGREN OY AB; P.O. Box 16, FIN-00101 Helsinki (FI).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AZ, BY, KZ, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
<b>(54) Title:</b> DYNAMIC ALLOCATION OF RADIO CAPACITY IN A TDMA SYSTEM  <b>(57) Abstract</b>  The invention relates to a method aiming at dynamic division of the radio capacity in a TDMA system dynamically between packet radio service and circuit switched service. According to the invention, some basic number of time slots are reserved for packet radio service and the rest are reserved for circuit switched service. When the traffic requirement of packet radio service increases, information regarding this is obtained by means of a request from a mobile station or through traffic measurement at the base transceiver station. This information is used as a criterion in allocating more time slots to packet radio service.		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LJ	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## Dynamic allocation of radio capacity in a TDMA system

5 The present invention relates to a method by which radio capacity is divided dynamically between packet radio service and circuit switched service in a TDMA system in which two-way traffic between base stations and mobile stations takes place in time slots on predetermined channels. The invention also relates to a mobile system operating according to the method.

10 Most present-day cellular networks offer circuit switched services for speech and data. The available frequency band is divided between these services, all having equal priority. The network does not take into account whether the capacity is used for the transmission of speech or data.

15 Considering burst-form data services, circuit switching does not exploit the channel optimally. Therefore packet radio services are used alongside existing circuit switched services in cellular networks. Since the existing radio band cannot be expanded, packet radio services must be fitted into the same band as circuit switched services. Thus a certain amount of capacity has to be taken from circuit switched  
20 services for packet radio services.

In TDMA cellular systems, a radio band is usually divided into multiple frequency bands (FDMA, Frequency Division Multiple Access), and each frequency band is further divided into multiple time slots. Logical channels are transmitted in the  
25 physical time slots of the radio interface. In circuit switched cellular systems, all time slots are used for control signaling and for circuit switched traffic.

The purpose of the invention is to indicate a method by which the capacity of a radio channel can be better exploited. The object is a method which is used in determining  
30 the number of time slots allocated, on the one hand, to packet radio service and, on the other hand, to circuit switched service. According to the invention, this is done by using the characteristics of Claim 1 by allocating dynamically more capacity, i.e. more time slots, to the form of service requiring  
it at a given time.

35

Cases associated with this topic have been discussed previously in certain patent publications. One example of them is EP-26 11 27, which describes a time-sharing telecommunications system wherein the spectrum is exploited in a relatively effi-

cient manner by dividing narrow-band radio frequency channels into at least two time slots, one to transmit coded speech signals and one to provide two-way transmission. However, this publication does not discuss the dynamic allocation of capacity, and it does not discuss packet radio services as such.

5

US patent 4 887 265 discloses a packet radio switched cellular system. In this system, a plurality of data calls can be switched to one and the same radio channel, whereby radio spectrum is saved. However, the publication mainly discusses the criteria of handoff. It does not discuss the dynamic allocation of capacity to packet  
10 radio and circuit switched services.

15

According to the present invention, some basic number of time slots are reserved for packet radio service and a number of time slots for circuit switched service. If, for example, the traffic need of packet radio service increases, information regarding  
this is obtained through a request flagged by a mobile station or through traffic measurement by the base station, whereupon this information is used as a criterion in the allocation of more time slots to this service. Such a request can be transmitted from a mobile station to a base station on a message or signaling channel (e.g. in call set-up signaling) or on a traffic channel, or it may be, for example, a short message  
20 output. The request may also be transmitted on a packet radio channel. The capacity required by each service is monitored in the base station system (BSS), which is in a known manner made up of base transceiver stations (BTS) and base station controllers (BSC), and from which information is transmitted to the mobile station regarding the channel configurations, i.e. the allocation of radio capacity (which  
25 channel is in the use of which service).

30

In the basic mode, all the time slots of the channel may be allocated to packet radio service when circuit switched service does not need capacity. In this case, one or several time slots are allocated to circuit switched service when a request for it is received, for example, from a mobile station in call set-up signaling. The base station controller (BSC) interprets the request from call set-up signaling and thereupon deallocates a channel which is in the use of packet radio service and allocates it to circuit switched service. Alternatively, a predetermined minimum number of time slots may be allocated in the basic mode to packet radio service,  
35 in which case more time slots will be allocated to packet radio traffic when it increases. When the number of time slots used for packet radio service is increased, the same number of time slots must be deallocated from circuit switched service in the same channel.

In a preferred embodiment of the invention, a certain minimum number of time slots are allocated in the basic mode to packet radio service, this minimum number being controlled on the basis of economic factors important for the traffic and/or the operator. The control can be coupled to the results of traffic measurement at the base transceiver station so that the control will be automatic. Alternatively, the operator may effect the control manually, and it may be based on historical information on traffic, etc.

In sparsely populated areas, or when the packet radio traffic of a TDMA cell is known to be very scanty or incidental, all of the time slots of the channel serving this cell may be allocated to circuit switched service. When an incidental need for packet radio traffic arises, information regarding this is transmitted to the base transceiver station, for example via the message channel of circuit switched service or via some other signaling channel, traffic channel or short-message output. For this purpose, also a specific message may be defined which the mobile station requesting the service will transmit to the base transceiver station. Preferably, however, existing messages are used for the request, for example a part of a call set-up message minimally modified, in which case also old services will function.

According to a preferred embodiment, more time slots for a service may be allocated in the same frequency band so that the maximum number of time slots allocated to the service will be equal to the number of time slots in the band. Alternatively, time slots may be additionally allocated to a service also in another channel.

Preferred embodiments of the invention are disclosed in the non-independent claims. The invention is described in greater detail with the help of the following examples, with reference to the accompanying figure, which shows time slots in a TDMA frame.

The object is thus a method which is used in determining the number of time slots in use, on the one hand, for packet radio service and, on the other hand, for circuit switched service. The same mechanism can be used in parallel for FDMA bands and, on the other hand, also for only one frequency band. In downlink packet radio control channels, the radio channels allocated to packet switched use must be flagged very often in order to keep the mobile stations informed of the channels currently in force.

In packet radio cellular systems, such as the GPRS system (General Packet Radio Service) standardizable for GSM/DCS 1800 systems, some of the channels must be allocated to packet radio traffic. In this case the easiest method is that one time slot or multiple time slots is/are allocated permanently to packet radio traffic, and the rest of the time slots are reserved for circuit switched services. However, it is possible to divide the capacity even more flexibly between circuit switched service and packet radio service. The TDMA frame of one carrier wave of the GSM/DCS 1800 system is illustrated in the accompanying figure. The upper row shows the TDMA frame MS RX received by a mobile station and the lower row the transmission frame MS TX, offset with respect to time. The figure shows how one time slot in both downlink direction and uplink direction is reserved for packet radio service GPRS. The rest of the time slots are reserved for circuit switched (CS) calls.

Packet radio service in TDMA systems is quite new as compared with methods dividing a common frequency band, such as Aloha-based protocol. In TDMA radio systems using packet transmission, usually a plurality of users share one carrier wave time slot (frequency band) in both uplink and downlink directions. As in GSM/DCS 1800 systems, one time slot out of the eight time slots of a 200 kHz radio carrier wave could be allocated to the GPRS channel. About 25 kbit/s could be transferred in this selected time slot.

The capacity of one time slot may be insufficient. In this case the operator could allocate also another time slot, and even all time slots of a 200 kHz radio carrier wave, to packet radio service.

When multiple time slots are available, their use can be either combined or separate. In combined use, the time slots of the same carrier wave form for transmission a capacity pool shared by the mobile stations. One and the same mobile station may use multiple time slots in order to achieve a higher data rate for packet transmission. In separate use, each time slot is a separate physical packet transmission channel, and such channels are allocated to the mobile stations in a cell so as to achieve an even distribution of traffic. The distribution may be controlled, for example, in the same manner as mobile stations in a GSM system are divided into separate paging groups.

In both cases, in time slot sharing and in separate use, increasing packet radio traffic in the cell may be served better by allocating, when need increases, more time slots to packet radio service.

Example 1

5 A situation is examined in which circuit switched connections are not in use. In this case, all time slots are allocated to packet radio service. The timing requirements of a packet radio channel are very strict. When a mobile station transmits a request for the transmission of a packet, the base station system must reserve a time slot for this mobile station within a few hundreds of milliseconds, or even faster. For this reason there must always be channel capacity available for packet radio service.

10 In a cellular network, calls are set up much more slowly. Normally a call is set up within about 3-5 seconds. When the base transceiver station detects signaling required for the setting up of a mobile-originated or mobile-terminated circuit switched call, one of the packet radio channels can be reserved for such a circuit switched call. Normally the maximum transmission time within one and the same reservation in packet radio service is limited. It is a reasonable assumption that the transmission time is below 1 second. If there is transmission on all of the packet radio channels, or on only one of them, the transmission of the packet is completed before the same channel needs to be allocated to circuit switched use. However, a number of time slots must be reserved for packet radio service, these time slots being always available for this service so that a certain minimum level of service can be guaranteed in the cell. This may be a parameter adjustable at the base transceiver station. The operator may adjust this parameter on the basis of the amount of traffic and economic calculations. When a circuit switched call has been completed, the channel is again released for packet radio service.

25 By means of this algorithm, rapid packet transmission can be accomplished without disturbing circuit switched traffic. The capacity for circuit switched traffic may be increased when the number of time slots reserved for packet radio service exceeds the minimum capacity indicated by the parameter.

30 The adjustment of the above-mentioned parameter could, of course, also be automated, for example on the basis of the traffic requirement measured by the base transceiver station, as described below.

35 In a normal operating mode, all the channels on one carrier wave (in GSM, eight time slots or channels in one burst) are reserved for packet radio services (GPRS). The signaling channels may be on a separate carrier wave or in certain allocated time slots, and the logical channels on the GPRS carrier waves. Mobile stations use

the conventional signaling of the mobile telephone system for call set-up. From call set-up signaling the base station system (BSS) detects that a call is arriving in the cell. The base transceiver station detects this after a mobile station has transmitted to it a Channel Request, which is signaled by the base transceiver station (BTS) to the  
5 base station controller (BSC) in a Channel Required message. The base station controller of the base station system checks whether there are free traffic channels, whereupon a channel in the use of packet radio service is released for circuit switched calls as follows. If a free traffic channel is found, the mobile station is given a free channel as soon as it needs a channel. If a free channel is not found,  
10 reallocation of the packet radio channel is initiated and the channel is allocated to circuit switched use immediately when needed.

The base station system needs a channel before it transmits an Assignment Request to the mobile station. The system will have ample time to reallocate the channel  
15 before the transmission of the Assignment Request. Within the time between the Assignment Request and the Channel Required message, signaling takes place on the signaling channel, in which case the channel in the use of packet radio service can be used until the Channel Required message is transmitted. After the channel has been taken into the use of circuit switched service and after the circuit switched  
20 call is completed, the channel is free and is reallocated to packet radio service.

The base station system keeps the mobile station informed of the division of radio capacity, i.e. transmits to the mobile station information as to which channels are in the use of which service (i.e. it transmits information regarding so-called channel  
25 configurations).

The checking of capacity and the channel deallocation, according to the invention, between packet radio and circuit switched services may be especially necessary in the case of handover, i.e. when a mobile station moves from one cell to another cell,  
30 where, for example, all channels are in the use of packet radio service. In this case the capacity checking and channel reallocation, described above, are preferably carried out after the base station system has received from the mobile station a Handover Request and before the base station system transmits to the mobile station a Handover Request Acknowledgement. In other respects the handover procedure is  
35 defined in the specifications of the mobile system and is therefore known to an expert in the art and is not described here in greater detail.



Example 2

The following situation is examined as another alternative. A certain minimum service level is required in a cell. For example, one time slot could always be reserved for packet radio service. The other time slots are used for circuit switched services, or they are free. The base transceiver stations measure the quantity of traffic transmitted on the packet radio channel. Of course, the channel allocation behavior in a cell must be examined carefully before application, for example on the basis of traffic measurements of the cell concerned or on the basis of history data obtained from corresponding cells elsewhere. In the utilization of a channel there is a certain percentage limit, and at a utilization ratio higher than this the channel becomes overloaded and the service level weakens. If the utilization ratio of a channel reaches this value, another time slot must be reserved for traffic. This can be applied to even eight time slots within one GSM carrier wave and even to multiple carrier waves.

When the utilization ratio of a channel decreases and reaches another, lower, level, one of the time slots in packet radio use can be deallocated.

The algorithm according to this second alternative gives a higher priority to packet radio service, and circuit switched services can use the capacity not required by packet radio services.

The determination of the threshold values may be based on long-term follow-up of traffic. Alternatively it may be variable in such a manner that by using the measuring results obtained within a specified past time period the threshold values are updated regularly.

Example 3

The following case is discussed as one further alternative. A certain service level, which may be quite low, is always offered in a cell. A mobile station may make a request to the channel control block for a few time slots, one or several. On the basis of this request the base transceiver station allocates more time slots to packet radio service. One channel must, of course, be allocated very rapidly to the mobile station. In this case additional channels cannot be reserved immediately. The mobile station is given the basic channel. During the Assignment Request concerning the subsequent packet the network has had enough time to allocate multiple channels to

packet radio service. Thus the mobile station may gain access to the additional capacity it requested initially, i.e. multiple time slots for transmission.

#### Example 4

5

One further alternative is discussed below. In a rural area the allocation of even one time slot, or part of a time slot, for packet radio service may be excessive if, for example, in the area there is only one mobile station, which transmits data once a week. In this case no basic capacity for packet radio service needs to be reserved in the cell.

10

When the mobile station needs to transmit packet data, it transmits a message to that effect to the network. Since now no free packet radio channels are available, the message may be transmitted on conventional signaling channels which are used for circuit switched services. The message may also be transmitted on other signaling channels, traffic channels or as a short-message output.

15

#### Example 5

20

The above examples 1 and 2 can be used in combination so as to ensure that both circuit switched services and packet radio services share the channel capacity in a "fair" manner. This means that a certain channel capacity is allocated to the use of both services according to a semi-fixed principle, and the services use other channels by using a combination of the algorithms of Examples 1 and 2 so that congestion situations with respect to packet radio services will be under control.

25


The base transceiver station transmits via control channels information to the mobile stations so that they can compete for channels, and also that the access into the network by mobile stations using low priority packet radio service could be prevented until more channels are available.

Claims

1. A method for dynamic division of radio capacity between packet radio service and circuit switched service in a TDMA system in which two-way traffic between base transceiver stations and mobile stations takes place in time slots on  
5 predetermined channels, **characterized in that**
  - in the basic mode a first predetermined number of time slots are reserved for packet radio service and a second predetermined number of slots are reserved for circuit-switched service, and that
  - on the basis of a predetermined criterion, one or more additional free time slot/slots  
10 is/are allocated to packet radio service and/or circuit switched service, a corresponding number of time slots being deallocated from the other service.
2. A method according to Claim 1, **characterized in that** the said first number of time slots comprises all time slots of a channel when circuit switched service does  
15 not require capacity, no time slot being reserved for circuit switched service, but one or multiple free time slot/slots is/are allocated to circuit switched service when a predetermined criterion is fulfilled.
3. A method according to Claim 1, **characterized in that** the said first number  
20 of time slots comprises a predetermined minimum number of time slots, in which case, on the basis of the said criterion, one free time slot is first allocated to packet radio service and during the assignment of the subsequent packet the necessary number of additional time slots are allocated.
- 25 4. A method according to Claim 3, **characterized in that** the said minimum number is adjustable, in which case the number is adjusted on the basis of traffic and/or factors of traffic economy.
5. A method according to any of the above claims, **characterized in that** the  
30 said predetermined criterion is a request received from a mobile station, the request requesting network capacity for packet radio service or for circuit switched service.
6. A method according to Claim 5, **characterized in that** the said pre-  
determined first number of time slots is 0 (zero), in which case a mobile station,  
35 in order to have access to packet radio service capacity, makes a request for it to the base transceiver station.

7. A method according to Claim 1, characterized in that the said pre-determined criterion is a threshold value obtained by traffic measuring occurring at the base transceiver station and that, when the traffic of the service concerned increases to above the predetermined first threshold value, one or more additional time slot/slots is/are allocated to this service and, when the traffic of the service concerned drops to below the predetermined second threshold, a corresponding number of time slots are deallocated from this service.
8. A method according to Claim 7, characterized in that the service concerned is packet radio service and that additional time slots are allocated, when necessary, from multiple channels.
9. A method according to Claim 7 or 8, characterized in that the determination of the threshold values is based on long-term measurement of the behavior of the traffic and/or that the threshold values are adjusted on the basis of the traffic measurement result over a specified time period.
10. A method according to any of the above claims, characterized in that the method is applied in parallel also to FDMA bands.
11. A time division multiple access (TDMA) mobile system which comprises a base station system (BSS) comprising base transceiver stations and base station controllers, as well as mobile stations, and in which two-way traffic between the base transceiver stations and mobile stations takes place in time slots on predetermined channels and in which mobile system there is packet radio service and circuit switched service, characterized in that, for dynamic division of radio capacity between packet radio service and circuit switched service,  
- in the basic mode the base station system (BSS) reserves for packet radio service a predetermined first number of time slots and for circuit switched system a predetermined second number of time slots,  
- the base station system monitors the capacity required for each service, and  
- allocates to packet radio service and/or circuit switched service, on the basis of a predetermined criterion, one or more additional free time slot/slots, deallocating a corresponding number of time slots from the other service.
12. A mobile system according to Claim 11, characterized in that the base station system transmits to a mobile station information regarding the division of radio capacity between packet radio service and circuit switched service.

1/1

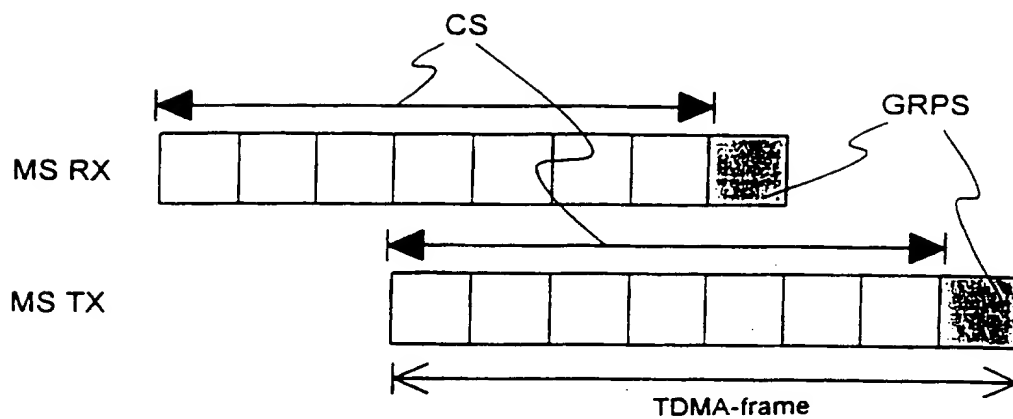

1  
INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 96/00017

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04Q 7/34, H04L 12/64

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04Q, H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4698802 A (LOUIS R. GOKE ET AL), 6 October 1987 (06.10.87), column 1 - column 51  --	1-4,10-11
A	EP 0168927 A2 (STC PLC), 22 January 1986 (22.01.86), page 2, line 30 - page 3, line 17; page 5, line 3 - line 17  --	1-12
A	EP 0250160 A2 (AMERICAN TELEPHONE AND TELEGRAPH COMPANY), 23 December 1987 (23.12.87), column 1, line 22 - line 31  --	1-12

☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.

- \* Special categories of cited documents:
  - "A" document defining the general state of the art which is not considered to be of particular relevance
  - "E" earlier document but published on or after the international filing date
  - "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
  - "O" document referring to an oral disclosure, use, exhibition or other means
  - "P" document published prior to the international filing date but later than the priority date claimed
  - "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
  - "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
  - "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
  - "&" document member of the same patent family

Date of the actual completion of the international search

28 June 1996

Date of mailing of the international search report

01 -07- 1996

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer  
Marcus Wik  
Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 96/00017

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0214352 A1 (INTERNATIONAL BUSINESS MACHINES CORPORATION), 18 March 1987 (18.03.87), column 2, line 19 - column 3, line 19 --	1-12
A	EP 0212031 A1 (INTERNATIONAL BUSINESS MACHINES), 4 March 1987 (04.03.87), column 1, line 50 - column 2, line 29, abstract -- -----	1-12

# INTERNATIONAL SEARCH REPORT

Information on patent family members

01/04/96

International application No.

PCT/FI 96/00017

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A- 4698802	06/10/87	AU-B,B- 574600 AU-A- 6976987 CA-A- 1269158 DE-A,T- 3786569 EP-A,A,A 0236102 SE-T3- 0236102 JP-A- 63023493	07/07/88 17/09/87 15/05/90 26/08/93 09/09/87 30/01/88
EP-A2- 0168927	22/01/86	GB-A,B- 2162022 JP-A- 61035648 US-A- 4707826	22/01/86 20/02/86 17/11/87
EP-A2- 0250160	23/12/87	AU-B,B- 576697 AU-A- 7428087 CA-A- 1266906 JP-A- 63013451 US-A- 4731785	01/09/88 14/01/88 20/03/90 20/01/88 15/03/88
EP-A1- 0214352	18/03/87	SE-T3- 0214352 CA-A- 1250936 JP-A- 62043936 US-A- 4761781	07/03/89 25/02/87 02/08/88
EP-A1- 0212031	04/03/87	CA-A- 1250935 JP-B- 7083380 JP-A- 62043935 US-A- 4763321	07/03/89 06/09/95 25/02/87 09/08/88



**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>H04Q 7/34, H04L 12/64</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 96/22665</b> <b>(43) International Publication Date:</b> 25 July 1996 (25.07.96)
<b>(21) International Application Number:</b> PCT/FI96/00017 <b>(22) International Filing Date:</b> 8 January 1996 (08.01.96) <b>(30) Priority Data:</b> 950097 9 January 1995 (09.01.95) FI <b>(71) Applicant (for all designated States except US):</b> NOKIA MOBILE PHONES LTD. (FI/FI); P.O. Box 86, FIN-24101 Salo (FI). <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> JOKINEN, Harri (FI/FI); Vähähiidentie 450, FIN-25370 Hiisi (FI). HÄMÄLÄINEN, Jari (FI/FI); Matti Tapion katu 1 F 17, FIN-33720 Tampere (FI). POSTI, Harri (FI/FI); Rantakatu 14 B 17, FIN-90120 Oulu (FI). <b>(74) Agent:</b> BERGGREN OY AB; P.O. Box 16, FIN-00101 Helsinki (FI).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AZ, BY, KZ, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>With amended claims.</i>  <b>Date of publication of the amended claims:</b> 26 September 1996 (26.09.96)
<b>(54) Title:</b> DYNAMIC ALLOCATION OF RADIO CAPACITY IN A TDMA SYSTEM  <b>(57) Abstract</b>  The invention relates to a method aiming at dynamic division of the radio capacity in a TDMA system dynamically between packet radio service and circuit switched service. According to the invention, some basic number of time slots are reserved for packet radio service and the rest are reserved for circuit switched service. When the traffic requirement of packet radio service increases, information regarding this is obtained by means of a request from a mobile station or through traffic measurement at the base transceiver station. This information is used as a criterion in allocating more time slots to packet radio service.		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic			SE	Sweden
CG	Congo	KR	Republic of Korea	SG	Singapore
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LR	Liberia	SZ	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
CZ	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobago
EE	Estonia	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	UG	Uganda
FI	Finland	ML	Mali	US	United States of America
FR	France	MN	Mongolia	UZ	Uzbekistan
GA	Gabon	MR	Mauritania	VN	Viet Nam

## AMENDED CLAIMS

[received by the International Bureau on 9 August 1996 (09.08.96);  
original claims 1-12 replaced by amended claims 1-11 (3 pages)]

1. A method for dynamic division of radio capacity between packet radio service and circuit switched service in a TDMA system in which two-way traffic  
5 between base transceiver stations and mobile stations takes place in time slots on predetermined channels, **characterized** in that
  - in the basic mode the base transceiver station allocates a first predetermined number of time slots for packet radio service and a second predetermined number of slots for circuit-switched service, and that
  - 10 - at the occurrence of a predetermined initiation, the base transceiver station allocates one or more additional free time slot/slots to packet radio service and/or circuit switched service, said initiation being one of the following: a new packet radio connection is set up, an existing packet radio connection is terminated, a new packet radio session is set up, an existing packet radio session is terminated, a  
15 handover concerning a certain mobile station is performed, or a certain threshold value is reached in a traffic measurement performed at the base transceiver station.
2. A method according to Claim 1, **characterized** in that the said first number of time slots comprises all data transmission time slots of a channel when circuit  
20 switched service does not require capacity, no time slot being reserved for circuit switched service, but one or multiple free time slot/slots is/are allocated to circuit switched service when a predetermined initiation occurs.
3. A method according to Claim 1, **characterized** in that the said first number  
25 of time slots comprises a predetermined minimum number of time slots, in which case, at the occurrence of said initiation, one free time slot is first allocated to packet radio service and during the assignment of the subsequent packet the necessary number of additional time slots are allocated.
- 30 4. A method according to Claim 3, **characterized** in that the said minimum number is adjustable, in which case the number is adjusted on the basis of traffic and/or factors of traffic economy.
5. A method according to Claim 1, **characterized** in that the said pre-  
35 determined first number of time slots is 0 (zero), in which case a mobile station, in order to have access to packet radio service capacity, makes a request for it to the base transceiver station.

6. A method according to Claim 1, wherein said occurrence of a predetermined initiation specifically means that a certain threshold value is reached in a traffic measurement performed at the base transceiver station, **characterized** in that when the traffic of the service concerned increases to above a predetermined first threshold value, one or more additional time slot/slots is/are allocated to this service and, when the traffic of the service concerned drops to below a predetermined second threshold, a corresponding number of time slots are deallocated from this service.
7. A method according to Claim 6, **characterized** in that the service concerned is packet radio service and that additional time slots are allocated, when necessary, from multiple channels.
8. A method according to Claim 7 or 8, **characterized** in that the determination of at least one of the first and second threshold values is based on long-term measurement of the behavior of the traffic and/or that at least one of the threshold values is adjusted on the basis of the traffic measurement result over a specified time period.
9. A method according to any of the above claims, **characterized** in that the method is applied in parallel also to FDMA bands, whereby the FDMA bands are treated like said time slots.
10. A time division multiple access (TDMA) mobile telecommunication system which comprises a base station system (BSS) comprising base transceiver stations and base station controllers, as well as mobile stations, and which mobile telecommunication system is equipped to handle two-way traffic between base transceiver stations and mobile stations in time slots on pre-determined channels and which mobile telecommunication system is equipped to offer packet radio service and circuit switched service, **characterized** in that, for dynamic division of radio capacity between packet radio service and circuit switched service,
- the basic mode of a base station system (BSS) comprises the reservation of a predetermined first number of time slots for packet radio service and a predetermined second number of time slots for circuit switched service,
  - the base station system comprises means for monitoring the capacity required for each service, and
  - the operation of a base station system (BSS) comprises a dynamic division phase in which, at the occurrence of a predetermined initiation, the base transceiver station

- allocates one or more additional free time slot/slots to packet radio service and/or circuit switched service, said initiation being one of the following: a new packet radio connection is set up, an existing packet radio connection is terminated, a new packet radio session is set up, an existing packet radio session is terminated, a
- 5 handover concerning a certain mobile station is performed, or a certain threshold value is reached in a traffic measurement performed at the base transceiver station.
11. A mobile telecommunication system according to Claim 10, **characterized** in that the base station system is equipped to transmit to a mobile station
- 10 information regarding the division of radio capacity between packet radio service and circuit switched service.

*This Page Blank (uspto)*